

## Data Sheet

Customer:

Product: Current Sensing Metal Chip Resistor  
-CSM Series

Size: 0402/0603/0805/1206/2010/2512

Issued Date: 7-Mar-23

Edition: REV. B4



VIKING TECH CORPORATION  
光頡科技股份有限公司  
No.70 Guangfu N. Rd., Hukou  
Township, Hsinchu County 303,  
Taiwan

TEL:886-3-5972931  
FAX:886-3-5972935•886-3-5973494  
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH  
光頡科技股份有限公司高雄分公司  
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,  
806, Taiwan

TEL:886-7-8217999  
FAX:886-7-8228229  
E-mail:sales@viking.com.tw


VIKING ELECTRONICS (WUXI) CO., LTD.  
光頡電子(無錫)有限公司  
No.22 Xixia Road, Machinery & Industry Park,  
National Hi-Tech Industrial Development Zone  
of Wuxi, Wuxi, Jiangsu Province, China  
Zip Code:214028  
TEL:86-510-85203339  
FAX:86-510-85203667•86-510-85203977  
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
7-Mar-23	7-Mar-23	7-Mar-23	7-Mar-23	
<b>Chun</b>	<b>Ben Chang</b>	<b>Ben Chang</b>		


**Construction**




**For Standard Power**

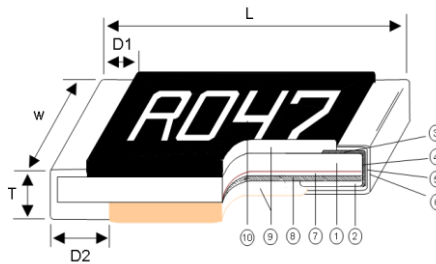

**For High Power (0603-2512)**

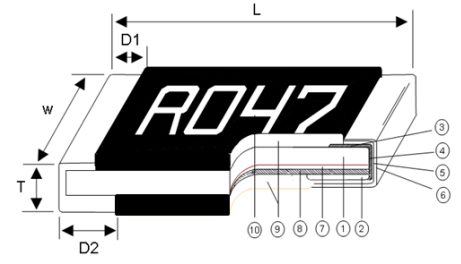

**For High Power (0402)**

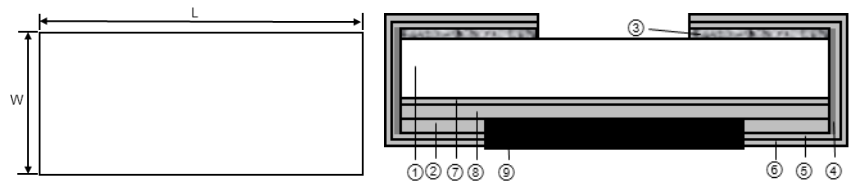

**Features**

- SMD Type designed for automatic insertion
- (CSM02 : The soldering side has a black mark on the product surface .)
- High power rating in small size
- Low resistance resistor for current detection
- Metal foil construction ensures high reliability and performance with very low and stable TCR
- Designed for current sense circuits in power electronic systems
- Pb-Free to meet RoHS requirements
- AEC-Q200 Compliance (only High Power Rating)

① Alumina Substrate	⑤ Barrier Layer	⑨ Primary Overcoat
② Bottom Electrode	⑥ External Electrode	⑩ Marking
③ Top Electrode	⑦ Adhesive	
④ Edge Electrode	⑧ Resistor Layer	

**Dimensions**

Type	Size (Inch)	Power (W)	Resistance Range (mΩ)	L	W	T	D1	D2	Weight (g) (1000pcs)
CSM02	0402	1/4	10 – 18	1.05±0.10	0.55±0.10	0.50±0.10	-	0.27±0.10	1.11
			19 – 50	1.05±0.10	0.55±0.10	0.45±0.10	-	0.27±0.10	0.93
CSM03	0603	1/8	10 – 29	1.55±0.10	0.85±0.10	0.40±0.10	0.30±0.15	0.45±0.15	1.98
			30 - 100	1.55±0.10	0.85±0.10	0.40±0.10	0.30±0.15	0.35±0.15	1.78
		1/2	10 – 18	1.70±0.15	1.00±0.15	0.55±0.15	0.35±0.25	0.35±0.25	2.98
			19 – 100	1.70±0.15	1.00±0.15	0.50±0.15	0.35±0.25	0.35±0.25	2.86
CSM05	0805	1/4	10 - 29	2.00±0.15	1.25±0.15	0.55±0.10	0.30±0.20	0.50±0.20	5.40
			30 - 100	2.00±0.15	1.25±0.15	0.52±0.10	0.30±0.20	0.35±0.20	4.93
		3/4	10 – 18	2.15±0.15	1.40±0.15	0.68±0.15	0.40±0.25	0.40±0.25	8.14
			19 – 100	2.15±0.15	1.40±0.15	0.62±0.15	0.40±0.25	0.40±0.25	7.06
CSM06	1206	1/2	10 - 29	3.05±0.15	1.55±0.15	0.58±0.15	0.50±0.25	0.90±0.25	10.58
			30 - 100	3.05±0.15	1.55±0.15	0.55±0.15	0.50±0.25	0.60±0.25	9.53
		1	10 – 18	3.20±0.15	1.70±0.15	0.68±0.15	0.50±0.25	0.50±0.25	15.06
			19 – 100	3.20±0.15	1.70±0.15	0.62±0.15	0.50±0.25	0.50±0.25	13.16
CSM10	2010	3/4	10 - 29	5.00±0.20	2.50±0.20	0.58±0.15	0.60±0.30	1.50±0.30	29.23
			30 - 100	5.00±0.20	2.50±0.20	0.55±0.15	0.60±0.30	0.90±0.30	24.92
		1.5	10 – 18	5.00±0.20	2.50±0.20	0.68±0.15	0.60±0.30	0.60±0.30	31.42
			19 – 100	5.00±0.20	2.50±0.20	0.62±0.15	0.60±0.30	0.60±0.30	28.35
CSM12	2512	1	10 - 29	6.30±0.20	3.15±0.20	0.58±0.15	0.60±0.30	1.80±0.30	46.42
			30 - 100	6.30±0.20	3.15±0.20	0.55±0.15	0.60±0.30	1.20±0.30	40.04
		2	10 – 18	6.40±0.20	3.20±0.20	0.68±0.15	0.70±0.30	0.70±0.30	45.21
			19 – 100	6.40±0.20	3.20±0.20	0.62±0.15	0.70±0.30	0.70±0.30	43.49

**Applications**


- Power Management Applications
- Switching Power Supply
- Over Current Protection in Audio Applications
- Voltage Regulation Module (VRM)
- DC-DC Converter, Battery Pack, Charger, Adaptor

**Part Numbering**


CSM	06	F	T	E	U	R100	
Product Type	Dimensions (LxW)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Marking
	02: 0402 03: 0603 05: 0805 06: 1206 10: 2010 12: 2512	D: ±0.5% F: ±1% G: ±2% J: ±5%	T: Taping Reel	D: ±50 E: ±100 F: ±200	W : 1/8W V : 1/4W U : 1/2W Q: 3/4W T: 1W A: 1.5W S: 2W	R010: 0.01Ω R100: 0.1Ω	: Standard (Standard Power / High Power) N: No Marking (Standard Power)

**Derating Curve**

**For Standard Power**

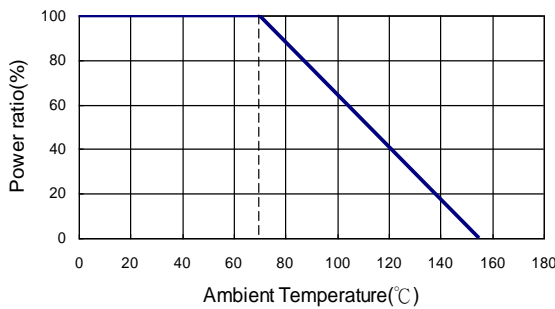

**For High Power**

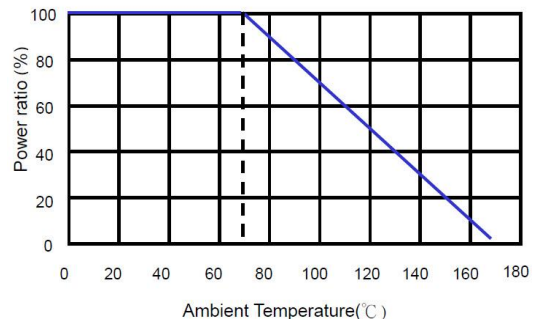

**Standard Electrical Specifications**

Type	Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)				TCR (PPM/°C)
				±0.5%	±1%	±2%	±5%	
CSM03 (0603)		1/8W	-55 ~ +155°C	-	10 - 19		±100	
				-	20 - 100		±50 ±100	
CSM05 (0805)		1/4W		-	10 - 19		±100	
				30 - 100	20 - 100		±50 ±100	
CSM06 (1206)		1/2W		-	10 - 19		±100	
				30 - 100	20 - 100		±50 ±100	
CSM10 (2010)		3/4W		-	10 - 19		±100	
				30 - 100	20 - 100		±50 ±100	
CSM12 (2512)		1W	-	10 - 19		±100		
			30 - 100	20 - 100		±50 ±100		

**High Power Rating Electrical Specifications**

Type	Item	Power Rating at 70°C	Operating Temp. Range	Max. Overload Current	Resistance Range (mΩ)				TCR (PPM/°C)
					±0.5%	±1%	±2%	±5%	
CSM02 (0402)		1/4W	-55 ~ +170°C	11.2A	30 - 50	10 - 50		±100	
CSM03 (0603)		1/2W		15.8A	30 - 100	10 - 100		±100	
CSM05 (0805)		3/4W		19.4A	30 - 100	10 - 100		±50	
CSM06 (1206)		1W		22.4A	30 - 100	10 - 100		±50	
CSM10 (2010)		1.5W		27.4A	30 - 100	10 - 100		±50	
CSM12 (2512)		2W		28.3A	30 - 100	10 - 100		±50	

**Current Sensing Metal Chip Resistor**

Operating Voltage= $\sqrt{P \cdot R}$  ; Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$  ; Operating Current= $\sqrt{P/R}$

■ Viking is capable of manufacturing the optional spec based on customer's requirement.

**■ Environmental Characteristics**

**For Standard Series**

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	<b>JIS-C-5201-1 4.8</b> <b>IEC-60115-1 4.8</b> -55°C~+125°C, 25°C is the reference temperature
Short Time Overload	$\pm(0.5\%+0.05\Omega)$	<b>JIS-C-5201-1 4.13</b> <b>IEC-60115-1 4.13</b> 5 X Rated Power for 5 seconds
Insulation Resistance	$\geq 10G$	<b>JIS-C-5201-1 4.6</b> <b>IEC-60115-1 4.6</b> Max. Overload Voltage for 1 minute
Endurance	$\pm(1.0\%+0.05\Omega)$	<b>MIL-STD-202 Method 108A</b> 70±2°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	$\pm(1.0\%+0.05\Omega)$	<b>JIS-C-5201-1 4.24</b> <b>IEC-60115-1 4.24</b> 40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF"
Dry Heat	$\pm(0.5\%+0.05\Omega)$	<b>JIS-C-5201-1 4.23</b> <b>IEC-60115-1 4.23.2</b> at +155 °C for 1000 hrs
Bending Strength	$\pm(1.0\%+0.05\Omega)$	<b>JIS-C-5201-1 4.33</b> Bending once for 60 seconds 2010, 2512 sizes: 2mm Other sizes: 3mm
Solderability	95% min. coverage	<b>JIS-C-5201-1 4.17</b> <b>IEC-60115-1 4.17</b> 245±5°C for 3 seconds
Resistance to Soldering Heat	$\pm(0.5\%+0.05\Omega)$	<b>JIS-C-5201-1 4.18</b> <b>IEC-60115-1 4.18</b> 260±5°C for 10 seconds
Voltage Proof	No breakdown or flashover	<b>JIS-C-5201-1 4.7</b> <b>IEC-60115-1 4.7</b> 1.42 times Max. Operating Voltage for 1 minute
Leaching	Individual leaching area $\leq 5\%$ Total leaching area $\leq 10\%$	<b>JIS-C-5201-1 4.18</b> <b>IEC-60068-2-58 8.2.1</b> 260±5°C for 30 seconds
Rapid Change of Temperature	$\pm(0.5\%+0.05\Omega)$	<b>JIS-C-5201-1 4.19</b> <b>IEC-60115-1 4.19</b> -55°C to +155°C, 5 cycles

RCWV(Rated Continuous Working Voltage)= $\sqrt{P \cdot R}$  or Max. Operating Voltage whichever is lower.

■ **Storage Temperature: 15~28°C; Humidity < 80%RH**

■ **Shelf Life: 2 years from production date.**

**■ Environmental Characteristics**


**For High Power Rating Series**

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	<b>JIS-C-5201-1 4.8</b> <b>IEC-60115-1 4.8</b> -55°C~+125°C, 25°C is the reference temperature
Short Time Overload	$\Delta R \leq \pm 1\%R$	<b>JIS-C-5201-1 4.13</b> <b>IEC-60115-1 4.13</b> 5 X Rated Power for 5 seconds 2512 size: 4* Rated Power for 5 seconds. Other size: 5* Rated Power for 5 seconds.
Insulation Resistance	$\geq 1000M\Omega$	<b>JIS-C-5201-1 4.6</b> <b>IEC-60115-1 4.6</b> Max. Overload Voltage for 1 minute
Operational Life	$\Delta R \leq \pm 1\%R$	<b>MIL-STD-202 Method 108</b> Condition D Steady State $T_A=125^\circ\text{C}$ at derated power. Measurement at $24 \pm 4$ hours after test conclusion
Biased Humidity	$\Delta R \leq \pm 1\%R$	<b>MIL-STD-202 Method 103</b> 85°C/85RH., 1000 hrs, apply 10% of operating power (current) or limiting element current whichever is lower
High Temperature Exposure	$\Delta R \leq \pm 1\%R$	<b>MIL-STD-202 Method 108</b> at +155°C for 1000 hrs
Temperature Cycling	$\Delta R \leq \pm 1\%R$	<b>JESD22 Method JA-104</b> -55°C to +125°C, 1000 cycles
Bending Strength (Board Flex)	$\Delta R \leq \pm 1\%R$	<b>JIS-C-5201-1 4.33</b> Bending once for 60 seconds 2010, 2512 sizes: 2mm Other sizes: 3mm
Solderability	95% min. coverage	<b>JIS-C-5201-1 4.17</b> <b>IEC-60115-1 4.17</b> 245±5°C for 3 seconds
Resistance to Soldering Heat	$\Delta R \leq \pm 1\%R$	<b>JIS-C-5201-1 4.18</b> <b>IEC-60115-1 4.18</b> 260±5°C for 10 seconds
Voltage Proof	No breakdown or flashover	<b>JIS-C-5201-1 4.7</b> <b>IEC-60115-1 4.7</b> 1.42 times Max. Operating Voltage for 1 minute
Resistance to solvents	Marking Unsmearred	<b>MIL-STD-202 Method 215</b> Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents.
Mechanical Shock	$\Delta R \leq \pm 1\%R$	<b>MIL-STD-202 Method 213</b> Wave Form: Tolerance for half sine shock pulse. Peak value is 100g's. Normal duration (D) is 6.
Vibration	$\Delta R \leq \pm 1\%R$	<b>MIL-STD-202 Method 204</b> 5 g's for 20 min., 12 cycles each of 3 orientations, 10-2000 Hz
ESD	$\Delta R \leq \pm 1\%R$	<b>AEC-Q200-002</b> <b>Human body model</b> 0402 sizes: 1KV Other sizes: 2KV
Flammability	No ignition of the tissue paper or scorching or the pinewood board	<b>UL-94</b> V-0 or V-1 are acceptable. Electrical test not required.
Terminal strength	No broken	<b>AEC-Q200-006</b> Force of 1.8kg for 60 seconds

RCWV(Rated Continuous Working Voltage)= $\sqrt{P \cdot R}$  or Max. Operating Voltage whichever is lower.

- **Storage Temperature: 15~28°C; Humidity < 80%RH**
- **Shelf Life: 2 years from production date.**

**■ Soldering Condition(IPC/JEDEC J-STD-020)**

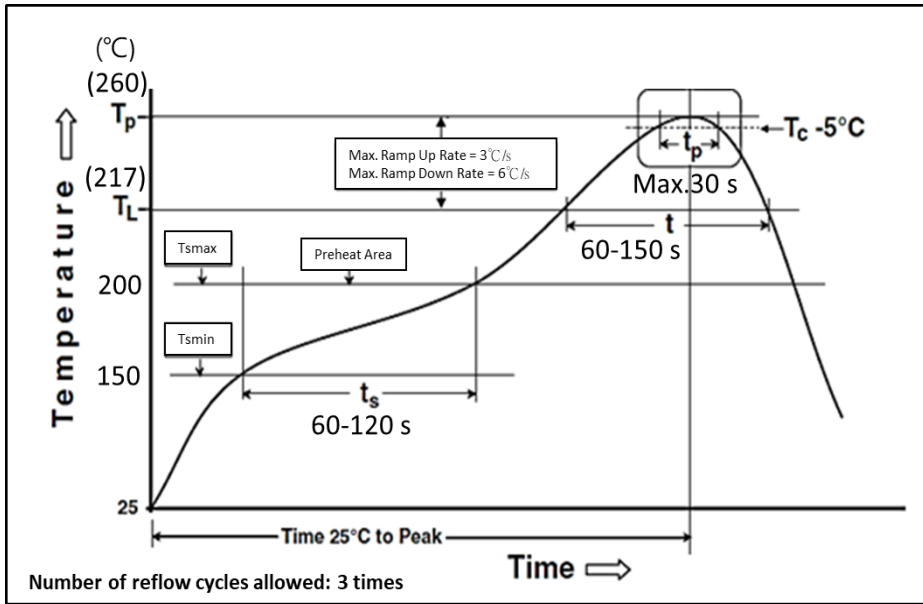


Reflow Profiles	
Profile Feature	Pb-Free Assembly
<b>Preheat</b> Min. Temperature ( $T_{smin}$ ) Max Temperature ( $T_{smax}$ ) Preheating time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	150 °C 200 °C 60-120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3 °C/second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	217 °C 60-150 seconds
Min. Peak temperature ( $T_p$ min)	235°C
Max. Peak temperature ( $T_p$ max)	260°C
Time ( $t_p$ ) within 5 °C of the specified classification temperature ( $T_c$ )	30 seconds max.
Ramp-down rate ( $T_p$ to $T_L$ )	6 °C/second max.
Time 25 °C to peak temperature	8 minutes max.

**■ Packaging**


Packaging Quantity & Reel Specifications

Unit: mm

Type	ΦA	ΦB	ΦC	W	T	Paper Tape (EA)	Emboss Plastic Tape (EA)
CSM02	178.0±1.0	60.0+1.0	13.5±0.7	9.5±0.1	11.5±1.0	10,000	-
CSM03	178.0±1.0	60.0+1.0	13.5±0.7	9.5±0.1	11.5±1.0	5,000	-
CSM05	178.0±1.0	60.0+1.0	13.5±0.7	9.5±0.1	11.5±1.0	5,000	-
CSM06	178.0±1.0	60.0+1.0	13.5±0.7	9.5±0.1	11.5±1.0	5,000	-
CSM10	178.0±1.0	60.0+1.0	13.5±0.7	13.5±1.0	15.5±1.0	-	4,000
CSM12	178.0±1.0	60.0+1.0	13.5±0.7	13.5±1.0	15.5±1.0	-	4,000

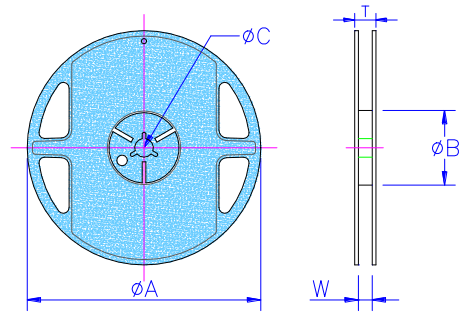


Paper Tape Specifications

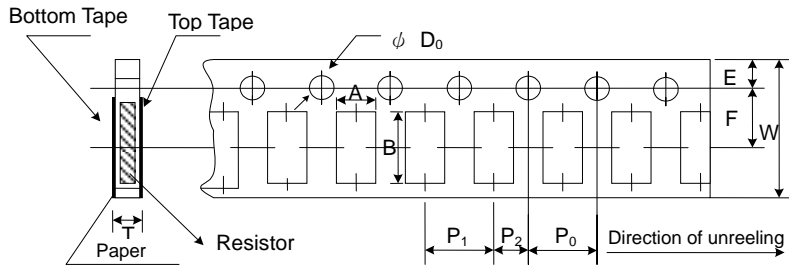

Unit: mm

Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ΦD <sub>0</sub>	T
CSM02 (1/4W)	0.66±0.06	1.18±0.06	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.55±0.05	0.60±0.06
CSM03	1.10±0.10	1.90±0.10	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.70±0.10
CSM03 (1/2W)	1.10±0.10	1.85±0.10	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.60±0.05
CSM05	1.60±0.10	2.40±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CSM05 (3/4W)	1.60±0.10	2.35±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.95±0.05
CSM06	1.90±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CSM06 (1W)	1.90±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.95±0.05


Embossed Plastic Tape Specifications

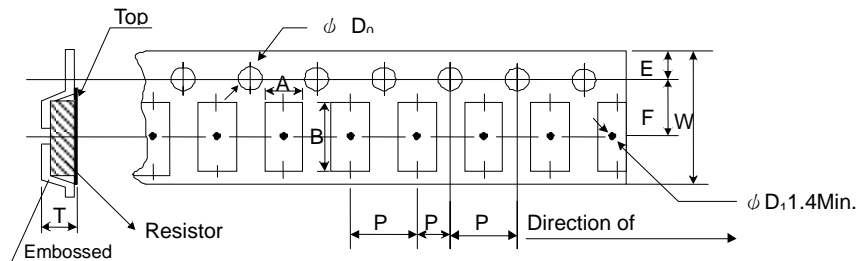

Unit: mm

Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ΦD <sub>0</sub>	T
CSM10	2.80±0.10	5.50±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.00±0.20
CSM12	3.50±0.10	6.70±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.00±0.20

**Recommend Land Pattern**

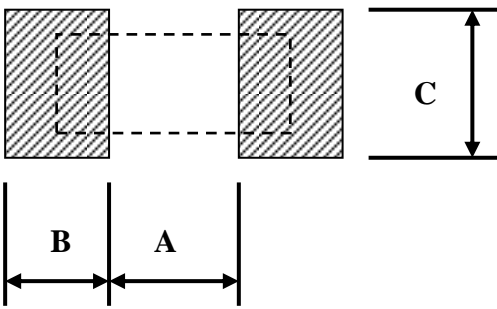

Pad Layout

Type	Resistance Range	A (mm)	B (mm)	C (mm)	t (μm)
CSM02	10-50mΩ	0.50	0.50	0.60	35
CSM03	10-29mΩ	0.40	1.20	0.90	-
	30-100mΩ	0.70	1.05	0.90	-
CSM03(1/2W)	10-100mΩ	0.50	1.00	0.90	35
CSM05	10-29mΩ	0.80	1.10	1.35	-
	30-100mΩ	1.00	1.00	1.35	-
CSM05(3/4W)	10-100mΩ	0.80	1.30	1.30	70
CSM06	10-29mΩ	0.9	1.70	1.70	-
	30-100mΩ	1.50	1.40	1.70	-
CSM06(1W)	10-100mΩ	1.50	1.40	1.70	105
CSM10	10-29mΩ	1.70	2.35	2.50	-
	30-100mΩ	2.80	1.80	2.50	-
CSM10(1.5W)	10-100mΩ	2.70	1.80	2.90	105
CSM12	10-29mΩ	2.30	2.90	3.20	-
	30-100mΩ	3.60	2.25	3.20	-
CSM12(2W)	10-100mΩ	3.80	2.10	3.40	105

t : copper foil minimum thickness of PCB

**Marking**

No Marking for 0402

**For 0603**

Type	Code
R10	0.100Ω
R01	0.010Ω
035	0.035Ω

**For 0805-2512**

Type	Code
R100	0.100Ω
R050	0.050Ω
R010	0.010Ω